

12 Misc.

- 12.3 Material bar caddie
- 12.4 Belts
- 12.6 Tool grinding attachment



Material bar caddie

Material bar caddie



MR 1330



MR 2330



MR 3330

Advantages :

- Capacity up to 2 to.
- Sturdy and well finished construction
- 8 Nylon rolls with strong bearing
- Steering rolls with axial ball bearing and lubricating nipple

Item No	Color	Length	Width	Height	Useful width	Weight	Rolls	Load capacity	Options
MR 1330	Blue RAL 5013	2000 mm	450 mm	480 mm	300 mm	46 kg	8	2000 kg	Colors, Roll brake
MR 2330	Blue RAL 5013	2000 mm	615 mm	665 mm	590 mm	62 kg	8	2000 kg	Colors, Roll brake
MR 3330	Blue RAL 5013	2000 mm	850 mm	700 mm	530 mm	76 kg	8	2000 kg	Colors, Roll brake

Belts

Glueable flat belts



- Available in 25 meters rolls
- Also available :
Bottle of glue Fixol ref. 01809

Item No	Width
Haba 8	8.00
Haba 10	10.00
Haba 15	15.00
Haba 20	20.00
Haba 25	25.00
Haba 30	30.00
Haba 40	40.00

Hot-pressing device for belts



- Pt-50
- The PT-50 is a hot-pressing device for the Thermofix joining systems for Habasit belts and tapes up to a width of 50 mm and a thickness of 2 mm. It is especially suitable for joining spindle belts and for many applications in the printing industry. It comes equipped with an innovative universal heating cartridge which can be used at all voltages between 110 V and 240 V with no modification. The PT-50 is mostly suitable for on-site installation.

Belt skiving attachment



- AT-60
- The AT-60 is a preparing device for skiving Habasit belts and tapes up to a width of 60 mm and a thickness of 2 mm. The belt is clamped and blocked on a steel plate. It is ground manually by means of an emery disk. Adjustment to belt thickness is possible in two steps. The AT-60 is especially suitable for the occasional preparation of single belts or spindle tapes during on-site maintenance.

V-Belt articulated Veelos




- Delivery in roller of 25 m

Item No	Width
Power twist ronde	8.00
Veelos 10	10.00
Veelos 13	13.00

Belts

Polycord round belts

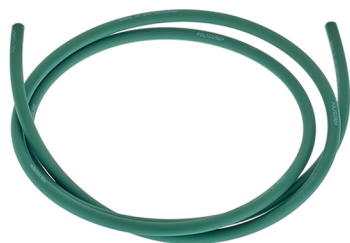


- Thanks to its high flexibility, Polycord round belts allow for unlimited changes of direction. Due to their high elasticity, Polycord round belts act as safety guards by reducing jolts and overloads and increase duration.
- Available by the meter

Also available :

Adhesive spray PERMANENT GRIFF ref. 00799

Item No	Ø
01810	2.00
01811	3.00
01812	4.00
01813	5.00
01814	6.00
01815	7.00
01816	8.00
01817	10.00
01818	12.00
01819	15.00

Hevaloid endless belts

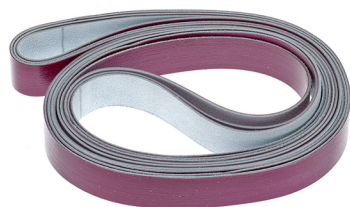

- Hevaloid endless belts are made from synthetic fibre of different thicknesses, impregnated with synthetic rubber and then vulcanised

Advantages :

- Resistant to oil, acid, and detergents
- Support permanent temperatures of 100°

Tool grinding attachment

Tool grinding attachment



- Easy to fit on Agathon, Clottu Tool-grinding machines

Item No	Collet	Divisions
AV 415/6-4	B6	4
AV 415/6-12	B6	12
AV 415/8-4	B8	4
AV 415/8-12	B8	12
AV 415/10-4	W10	4
AV 415/10-12	W10	12
AV 415/12-4	W12	4
AV 415/12-12	W12	12
AV 415/15-4	W15	4
AV 415/15-12	W15	12